



22

kWh/1000h

81

lumens/watt

ConstantColor™ CMH Supermini

CMH20/T/UVC/U/830/GU6.5 TU
93095259

Product information

CMH lamps have opened new possibilities for lighting design, combining the power and light quality of far larger and less efficient lamps. It is now possible to achieve lighting design that could not be achieved previously with inferior technologies.

ConstantColor™ CMH Precise™ **technology platform has been developed with specific focus to retail applications. GE Precise™ technology offers superb overall light quality, outstanding lumen maintenance, improved efficacy, while maintaining long life and reliability. These qualities are why GE is the leader in ceramic metal halide technology.**

Application areas



Retail



Industrial

Product data

| | |
|----------------------------|---------------|
| Product Code | 93095259 |
| Light Center Length [mm] | 30 |
| Bulb Shape | Tubular |
| Bulb Finish | Clear |
| Net weight per piece [g] | 6 |
| Gross weight per piece [g] | 12 |
| Operating position | U - Universal |
| UV radiance | Exempt |
| Brand | Tungsräm |
| Cap/Base | GU6.5 |

Performance data

| | |
|---|-------|
| Colour Code | 830 |
| Rated Lumens [lm] | 1600 |
| Weighted energy consumption [kWh/1000h] | 21.93 |
| Nominal efficacy [LpW] | 81 |
| Rated efficacy [LpW] | 80.3 |
| Energy efficiency class (EEC) | G |
| Nominal chromaticity coordinate X | 0.434 |
| Nominal chromaticity coordinate Y | 0.4 |
| Nominal correlated colour temperature (CCT) [K] | 3000 |
| Nominal lumens [lm] | 1615 |
| Colour Rendering Index (CRI) [Ra] | 81 |


Electrical data

| | |
|---------------------------------|------|
| Rated power [W] | 19.9 |
| Lamp Current [A] | 0.2 |
| Design Ambient Temperature [°C] | 25 |
| Run-up time (sec) | 90 |
| Hot restart time (sec) | 240 |
| Ballast Required | Yes |
| Nominal power [W] | 20 |
| Nominal lamp voltage [V] | 95 |


Logistic data

| | |
|--------------------------|--------------------|
| DUN Code | 15994100015878 |
| EAN Code | 5994100015871 |
| Pack Quantity | 12 |
| Inner pack type | BOX |
| Outer pack type | OUTER BOX |
| Layer quantity | 1248 EUR |
| Layer quantity EUR | 1248 |
| Pallet quantity EUR (PC) | 17472 |
| Outer case size | 115 x 80 x 80 (mm) |
| Product status | Available |


Light distribution

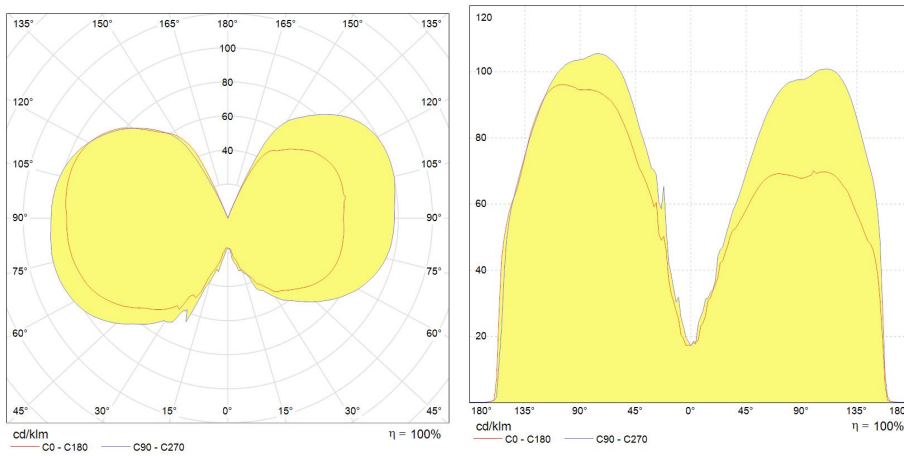

Lumen maintenance data

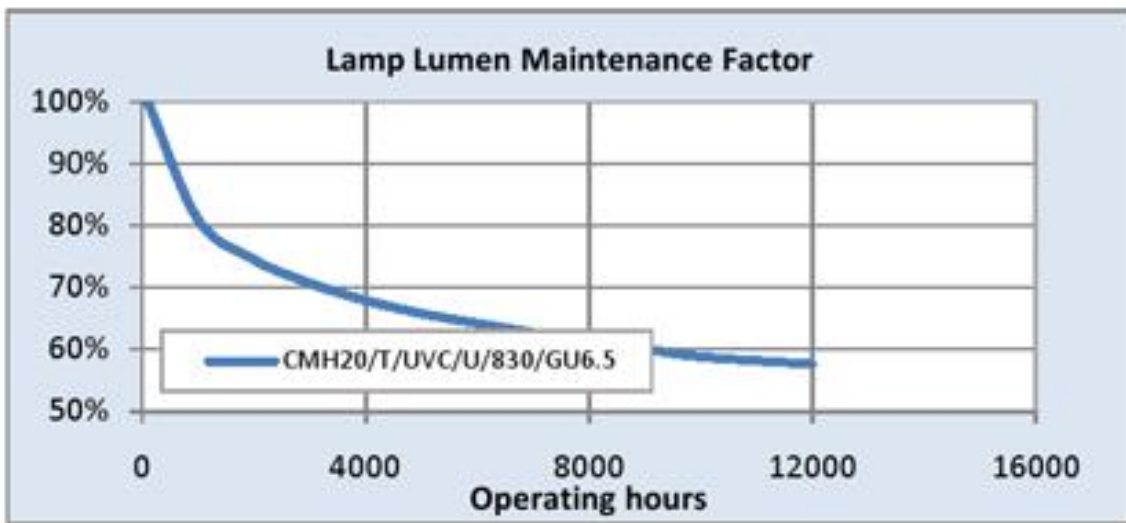

Survival data

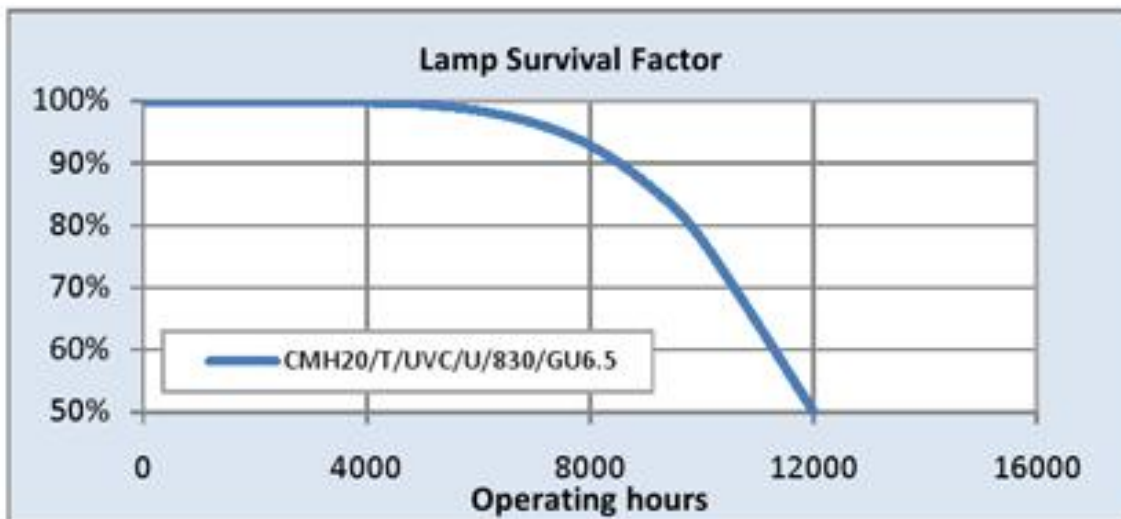

Downloads & Links

[Go to the catalog site \(HTTP\)](#)

[Photometry \(IES\)](#)

[Product datasheet \(PDF\)](#)

[High-res images / Technical drawings \(HTTP\)](#)