
TUNGSRAM[™]

Innovation is our heritage EST. 1896





ConstantColor™ CMH MR16 CMH20/MR16/UVC/U/830/GX10/SP TU 93102192

Product information

ConstantColor™ CMH lamps combine HPS technology (providing stability, efficiency & uniformity) and Metal Halide Technology (providing bright white quality light) to produce highly efficient light sources with good colour rendering and consistent colour performance through life.

This is achieved by using the ceramic arc tube material from the Lucalox [™] lamp, which minimises the chemical changes inside the lamp through life.

Application areas



🔛 Industrial

Product data

Product Code	93102192
Bulb Shape	Mirrored reflector
Bulb Finish	Clear
Bulb Diameter [mm]	51
Maximum Overall Length [mm]	54.5
Net weight per piece [g]	61
Gross weight per piece [g]	92
Operating position	U - Universal
Mercury Content [mg]	2.3
UV radiance	Exempt
Brand	Tungsram
Cap/Base	GX10

Performance data

Nominal/ Rated Beam Angle [°]	12
Nominal/ Rated Beam Angle (°)	11
Colour Code	830
Nominal center beam candlepower (CBCP) [cd]	9000
Rated peak intensity in [Cd]	9289
Rated Lumens [lm]	882
Weighted energy consumption [kWh/1000h]	21.73
Useful lumens (at 90° cone) [lm]	882
Nominal efficacy [LpW]	50
Rated efficacy [LpW]	44.7
Energy efficiency class (EEC)	G
Rated average life [h]	12000
Nominal chromaticity coordinate X	0.431
Nominal chromaticity coordinate Y	0.403
Nominal correlated colour temperature (CCT) [K]]	3000
Nominal lumens [lm]	1000
Colour Rendering Index (CRI) [Ra]	80

Electrical data


Rated power [W]	19.8
Lamp Current [A]	0.2
Design Ambient Temperature [°C]	25
Run-up time (sec)	90
Hot restart time (sec)	240
Dimming Capability	Yes
Ballast Required	Yes
Nominal power [W]	20
Nominal lamp voltage [V]	95

Logistic data


DUN Code	15994100017186
EAN Code	5994100017189
Pack Quantity	12
Inner pack type	BOX
Layer quantity	288 EUR, 348 UK
Layer quantity EUR	288
Layer quantity UK	348
Pallet quantity EUR (PC)	4032
Pallet quantity UK (PC)	4872
Outer case size	226 x 171 x 77 (mm)
Product status	Available

 67.5° 90.0° $\eta = 100\%$


Light distribution

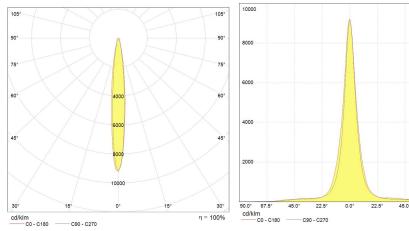

Lumen maintenance data

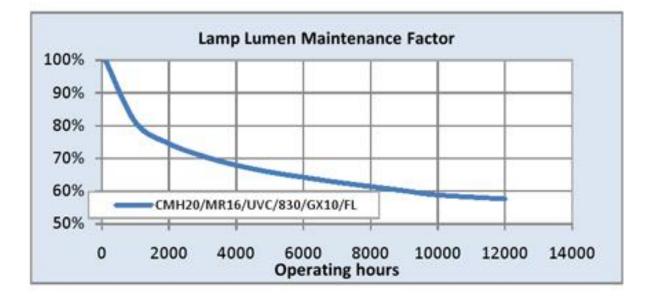

Survival data

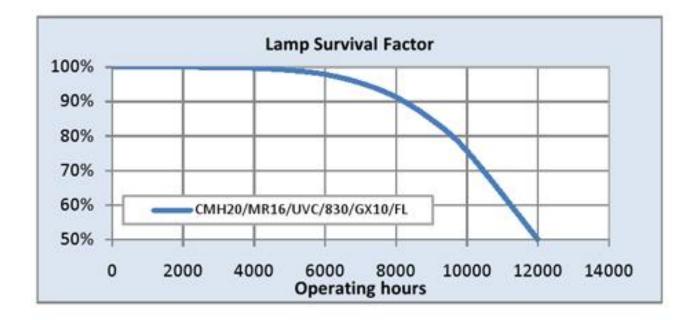

Downloads & Links

Go to the catalog site (HTTP) Photometry (IES) Product datasheet (PDF)

High-res images / Technical drawings (HTTP)



Tungsram is a registered trademark of Tungsram Operations Kft.

tungsram.com

We in Tungsram Operations Kft. are constantly developing and improving our products. For this reason, all product descriptions in this catalogue are intended as a general guide, and we may change specifications from time to time in the interest of product development, without prior notification or public announcement. All descriptions in this publication present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, Tungsram cannot accept any liability arising from the reliance on such data to the extent permitted by law.